
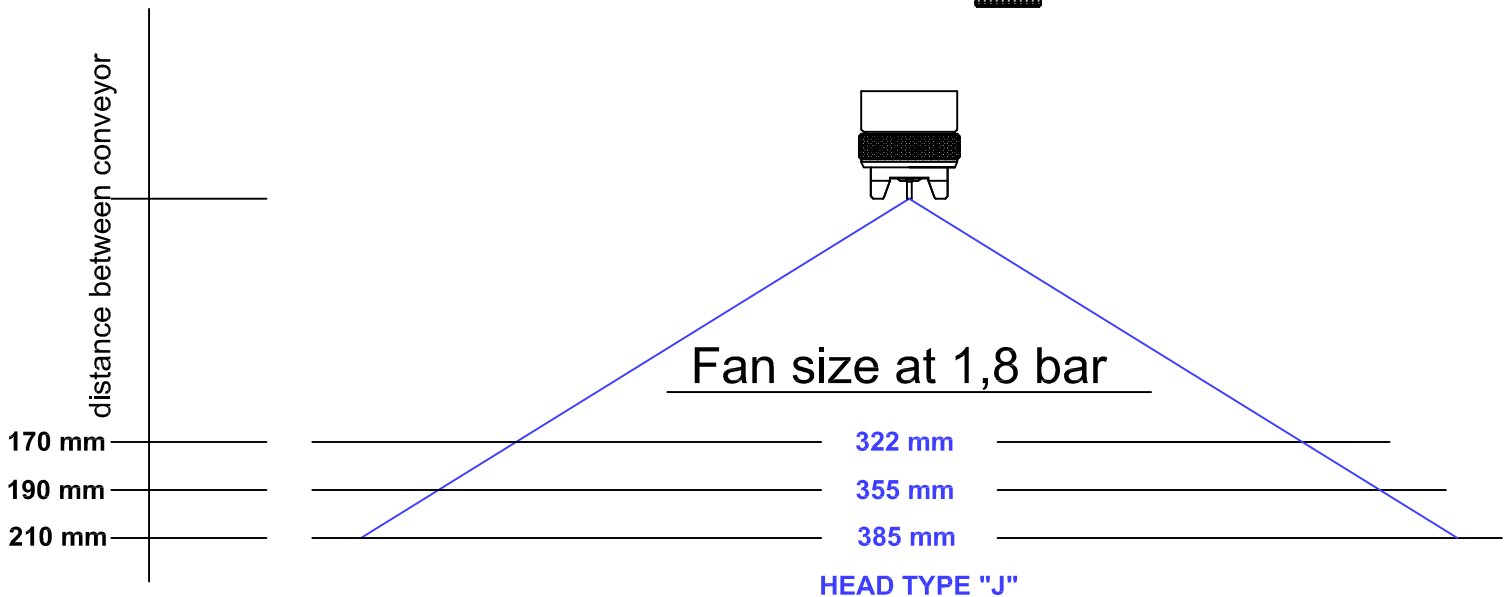


# spraycolor®


## MT

DATASHEET

- L V L P -

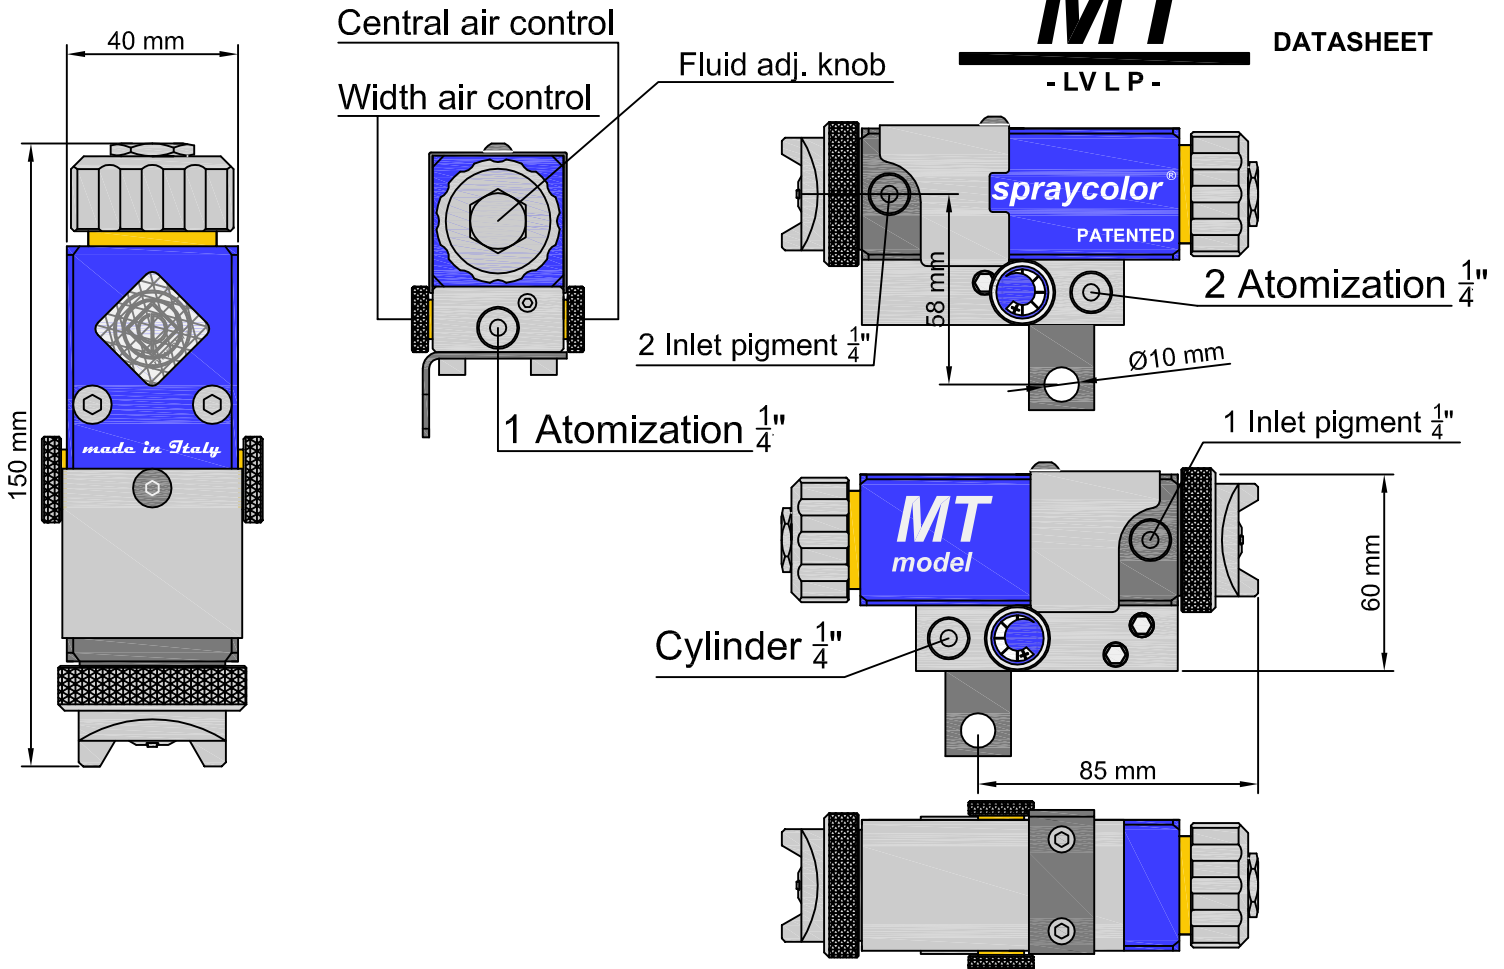

\* Test with water 1,8 bar for atomization  
Pressure pump 0,5 bar  
Size  $\text{Ø} 1.0$  mm 8 click



# spraycolor<sup>®</sup>

## **MT**

DATASHEET

- LVLP -

### MODEL

### MT

TECHNOLOGY	LVLP
AIR CONSUMPTION	180 l/min
WEIGHT	1100 gr.
RECOMMENDED AIR CYLINDER	3,5 MAX 4 bar
RECOMMENDED AIR ATOMIZATION	start 1,6 to 2,5 bar MAX
INLET PIGMENT 1 AND 2	$\frac{1}{4}$ "
INLET AIR ATOMIZATION 1 AND 2	$\frac{1}{4}$ "
INLET AIR CYLINDER	$\frac{1}{4}$ "
RECOMMENDED VISCOSITY	LOW -
KIT SIZE AVIABLE	Ø 0.8 - Ø 1.0 - Ø 1.2 - Ø 1.5 mm -

- ADVANTAGES:**
- 1 Certified UNI EN 13966-1.
  - 2 Easy maintenance.
  - 3 Delicate painting (ideal for items with low thickness).
  - 4 Reduced overspray.
  - 5 High transfer efficiency.